


PH304 - SEWER JET - 4000 PSI

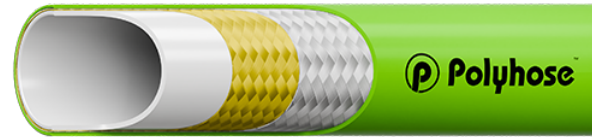

Construction

- Inner tube** Thermoplastic Elastomer
- Reinforcement** One or more Braids of Aramid Fiber and one braid of synthetic fiber
- Cover** Polyurethane, Green Colour
- Application** Particularly suitable for use with compact vehicles and lateral sewer line cleaning equipment. High pressure capability combined with high safety factor, flexibility and small profile. Abrasion and cut resistant cover designed for long life. Ideal for use in small pipes and ducts. Bonded construction to resist kinking. Available in long lengths

Note : Special colours available on request

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m
PH304-04	-04	06	1/4	6.4	0.510	13.0	5000	345	20000	1380	1.6	40	129
PH304-06	-06	10	3/8	9.5	0.640	16.2	4000	280	16240	1120	2.4	60	158
PH304-08	-08	12	1/2	12.7	0.805	20.4	4000	280	16240	1120	4.0	100	256
PH304-10	-10	16	5/8	16.0	0.970	24.6	4000	280	16240	1120	4.5	115	356
PH304-12	-12	20	3/4	19.0	1.150	29.2	4000	280	12000	840	5.0	125	514
PH304-16	-16	25	1	25.4	1.450	36.8	4000	280	10000	690	6.3	160	734
PH304-20	-20	32	1.1/4	31.8	1.800	45.7	3600	250	9000	625	10.0	250	1136



Temperature Range : Continuous: -40°C to +60°C