


PH704 SERIES

Applicable Standard : Polyhose proprietary hose

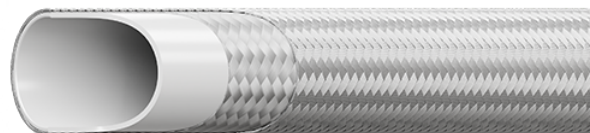

Construction

Inner tube	Polyamide
Reinforcement	Single braid of synthetic fiber and single braid of stainless steel wire
Application	Medium pressure hydraulic Lines 120 to 210bar. Suitable for applications requiring chemical resistance to solvents and aggressive fluids. Due to low permeation value of polyamide, the hose is also suitable for industrial gases.

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W g/m	Qty (ft)	Type	No of sections
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm				
PH704-03	-03	05	3/16	4.80	0.350	8.9	3045	210	12180	840	1.8	45	90			
PH704-04	-04	06	1/4	6.40	0.435	11.1	2755	190	11020	760	3.0	75	115			
PH704-06	-06	10	3/8	9.65	0.591	15.0	2393	165	9572	660	5.0	125	170			
PH704-08	-08	12	1/2	12.83	0.697	17.7	1740	120	6960	480	6.6	165	260			



Temperature Range : Continuous : -40°C to +100°C