


**PH721 / PH722 - FLUOROPOLYMER - LOW PRESSURE
CONDUCTIVE / NON - CONDUCTIVE**

Construction

Inner tube	FEP (Fluorinated Ethylene Propylene)											
Reinforcement	Single braid of synthetic fiber											
Cover	Polyurethane, Transparent											
Application	Conventional paint Spraying, Low pressure paint circulation and supply, Low pressure electrostatic lacquer system, Low pressure chemical product supply systems											

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		g/m	Qty (ft)	Type	No of sections
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm				
PH721 / PH722-04	-04	06	1/4	6.4	0.472	12.0	290	20	1160	80	3.5	90	117			
PH721 / PH722-06	-06	10	3/8	9.5	0.600	15.2	220	15	880	60	5.1	130	175			
PH721 / PH722-08	-08	12	1/2	12.7	0.827	21.0	145	10	580	40	7.1	180	275			

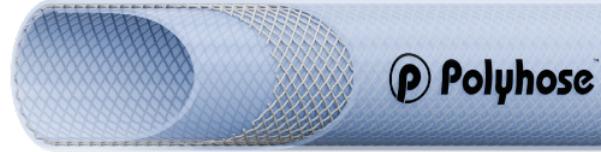

Temperature Range : Continuous: -40°C to +95°C Temp. not to exceed +70°C for Air and Water based fluids