


PH729 / PH730 - LOW PRESSURE CONDUCTIVE / NON - CONDUCTIVE

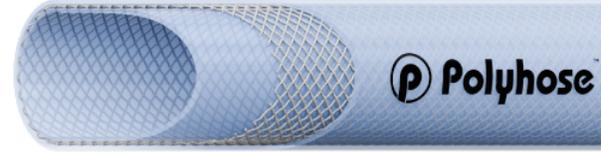

Construction

- Inner tube** Polyamide
- Reinforcement** Single braid of synthetic fiber
- Cover** Polyurethane, Transparent
- Application** Conventional paint Spraying, Low pressure paint circulation and supply, Low pressure electrostatic lacquer system, Low pressure chemical product supply systems

Item Code	Dash Size	DN	ID		OD		WP		BP		BR/r		W	Qty (ft)	Type	No of sections
			inch	mm	inch	mm	psi	bar	psi	bar	inch	mm	g/m			
PH729 / PH730-04	-04	06	1/4	6.4	0.413	10.5	290	20	1170	80	1.0	25	72			
PH729 / PH730-05	-05	08	5/16	8.0	0.472	12.0	250	17	1015	70	1.2	30	85			
PH729 / PH730-06	-06	10	3/8	9.5	0.555	14.1	220	15	880	60	1.4	35	113			



Temperature Range : Continuous: -40°C to +95°C Temp. not to exceed +70°C for Air and Water based fluids