


SPILL PLUGS

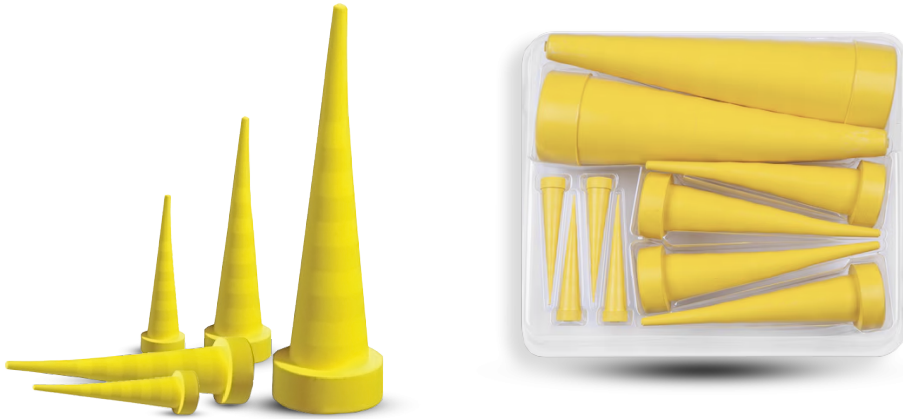

INDUSTRIES / APPLICATIONS

- Hydraulic System Repairs and Maintenance
- Offshore Operations
- Vehicles Utilising Hydraulic Systems (such as forestry vehicles, military vehicles, and construction vehicles)
- Maintenance of Fluid-Carrying Lines

Note : Only for use in non-pressurised systems.

Temperature Range : -25°C to +90°C

SPILL PLUGS SPECIFICATIONS					
PART NUMBER	DESCRIPTION	SIZE RANGE(MM)	SIZE RANGE(IN)	QUANTITY PACK	COLOR
PHSPLPLGNITMICYL	Micro	1 - 13	3/64 - 1/2	20	Yellow
PHSPLPLGNITMEDYL	Medium	8 - 26	5/16 - 1	10	Yellow
PHSPLPLGNITLARYL	Large	12 - 38	1/2 - 1½	4	Yellow
PHSPLPLGNITMIXYL	Mixed Pack - 4 Micro 4 Midium 2 Large	1 - 38	3/64 - 1½	10	Yellow

Installation Instructions



1. Insert



2. Push



3. Push & Twist